


## STANDARD REINFORCEMENT MESH

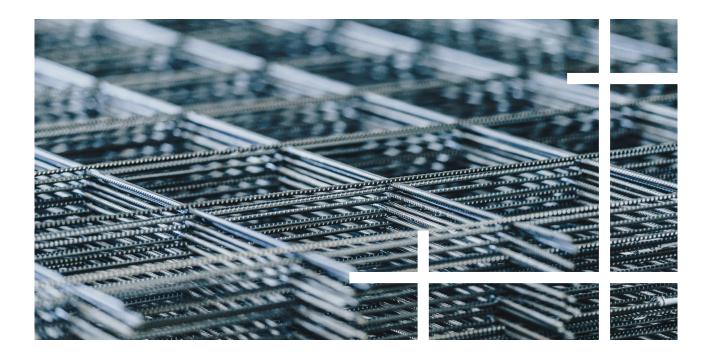

Standard reinforcement mesh is a standardized welded wire mesh, produced in different varieties.

Baustahlgewebe offers standard and special meshes in both grades. Normal ductility meshes made of cold-drawn wire as well as high ductility meshes made of hot-rolled wire with special ribbing.


## **PRODUCT SPECIFICATION**

Grade	» B500A, B600A	or	B500B
Ductility	» Normal		High, on request
Fabricated	» According to AFCAB NF A 35-080-2 or NF A 35-024		
Availability	» From stock or production; B500B on request		



## STANDARD REINFORCEMENT MESH

ACCORDING TO AFCAB NF A 35-080-2 OR NF A 35-024

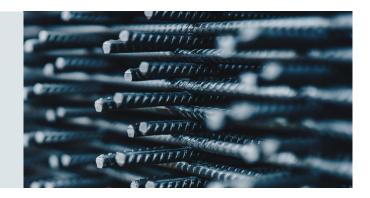

Mesh type	Price € / Item	Weight kg / Item	ltems per bundle
RAFP	11,35	9,00	100
CAFP	13,40	10,80	100
VAFP	13,65	9,60	100
TAF10	23,35	18,85	70
TS20	41,20	35,81	40
TS25	50,00	43,49	40
TS35	66,65	57,98	30
TS50	87,20	75,84	20
TS60	115,35	100,60	16
TS15C	24,90	21,31	70
TS25C	67,85	57,98	30
TS25CS	34,50	28,99	40
TS40C	101,75	86,98	20
TS50C	133,10	113,76	15
TS65C	168,15	143,71	10

Delivered in complete lorry loads (mixing types is possible) to an unloading point and in original packaging. Four lifting straps are attached to each bundle; these are charged at  $\in$  3/item.

The prices per item are valid for complete factory bundles including delivery/not unloaded.